


Data Line Protection

MODEL

612/624/648 Series

12/24/48 Port Rackmount

110 Punchdown to RJ45

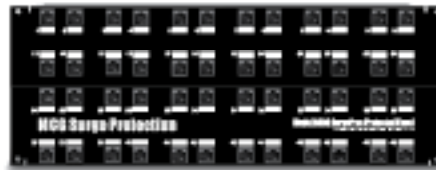

Transient surge energies from sources such as nearby lightning strikes, inductive load switching, ground loop currents, and electrostatic discharge are clamped by AC protectors into the shared communication ground, resulting in damage to expensive communication hardware. 612/624/648 Series includes 12, 24, and 48 port, 19" rack mounted protection units that feature 110 punchdown to RJ45 connectors. CAT6 performance. Also available in configurations that offer protection for Telco and ISDN circuits.

SPECS

Model	Pins Protected	Std. Clamp Voltage	Current	Height	Connectors: 110 Block to RJ45 Connectors Response Time: <5ns UL Listing: UL497B Listed unless noted. ROHS Compliant unless noted. Warranty: 20-year warranty
612-C6	All Pins	7.5 volts	100A	1U	
612-60V-4W*	Ctr 4 Pins	60 volts	50A	1U	
612-240V-4W*	Ctr 4 Pins	240 volts	75A	1U	
624-C6	All Pins	7.5 volts	100A	2U	
648-C6	All Pins	7.5 volts	100A	4U	

*Not UL listed or ROHS compliant

