

- 12 Burt Drive
- Deer Park, NY 11729
- (800) 851-1508
- (631) 586-5125
- Fax: (631) 586-5120
- sales@mcgsurge.com

INSTALL. INSTRUCTIONS, DLP-25 (Light Duty)

CAUTION: NEVER INSTALL PROTECTOR DURING A LIGHTNING STORM.

IMPORTANT: Make sure that the maximum peak or DC voltage to Ground does not exceed the maximum allowable system voltages show in Table 1.


Step 1) Protector Location and Grounding

1. Remove power to all signal lines before wiring protector.
2. Mount protector to DIN rail (or flat surface) such that protector is as close as possible to the protected equipment.
3. Ground protector to equipment using a minimum 14 AWG wire no longer than 6 inches (15 cm). Connect ground wire to position six (labeled "G") on "OUTPUT" or "INPUT" terminal block. Connect other end of ground wire to chassis of protected equipment.


Step 2) Connect Signal Lines

1. Refer to the wiring diagrams below to connect signal lines. The left diagram is for systems with a nominal current of 5 Amps or less. The right diagram is for systems with a nominal system current greater than 5 Amps. Note: Only one terminal block is used for parallel connection. NOTE: It may be possible to twist the wires together and insert both wires in each port for the parallel connection. The recommended strip length for the DLP-25 is 0.315" (8mm).

SERIES CONNECTION (For 5A and less nominal system current)

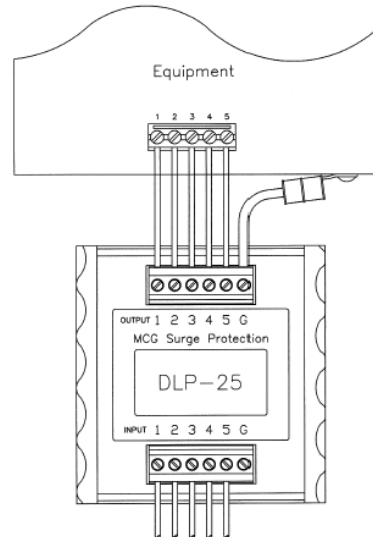

PARALLEL CONNECTION (For greater than 5A nominal system current)

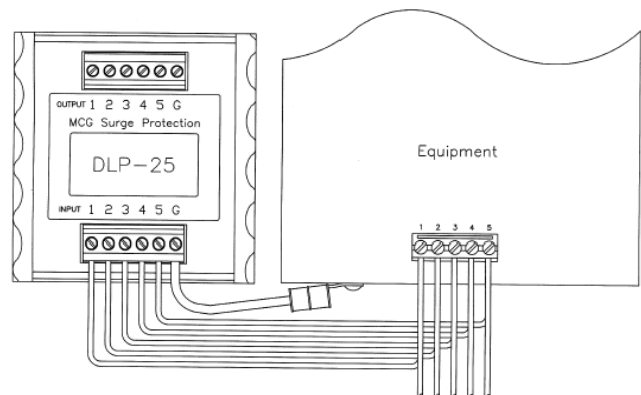

- 12 Burt Drive
- Deer Park, NY 11729
- (800) 851-1508
- (631) 586-5125
- Fax: (631) 586-5120
- sales@mcgsurge.com

Table 1

Model Name (Light Duty)	Model Name (Std. Duty)	Model Name (Heavy Duty)	Maximum Applied Voltage, Line – Ground (DC or peak)
DLP-25-6V	DLP-25-6V2	DLP-25-6V5	6.9
DLP-25-12V	DLP-25-12V2	DLP-25-12V5	16
DLP-25-25V	DLP-25-25V2	DLP-25-25V5	30
DLP-25-36V	DLP-25-36V2	DLP-25-36V5	39
DLP-25-55V	DLP-25-55V2	DLP-25-55V5	57
DLP-25-100V	DLP-25-100V2	DLP-25-100V5	113
DLP-25-150V	DLP-25-150V2	DLP-25-150V5	161
DLP-25-180V	DLP-25-180V2	DLP-25-180V5	188

Specifications

Number of Protected Circuits: 5

Protection modes: L-L, L-G

Connection: Series connected or shunt/parallel connected

Rated Voltage: Various (See table 1)

Certification: UL497B Listed

Series Resistance per circuit: 0 Ohms (light duty models)

Rated System Current per circuit: 5 ADC (series connected)

Unlimited (shunt/parallel connected)

Surge Capacity per Circuit, Light Duty Model: 5,000 Watts (10x1000 microsecond)

Temperature (Operating/Storage): -55°C to 65°C / -55°C to 75°C, 0% to 95% non-condensing RH

Protection Type: Bidirectional

Connection: Screw Terminals: (Stripping length 0.315"/8mm)

Wire Gauge Range: 22 – 12 AWG

Dimensions, Protector, Overall: 2.95"L x 2.83"W x 1.86"D (74.9mm L x 71.9mm W x 47.3mm D)

Dimensions, DIN Rail section (provided): 3.0"L

Mounting: DIN Rail mount (DIN 35mm type)

Enclosure: Aluminum

Warranty: 10 years

299-601-05